




CATALOG OF PRODUCTS

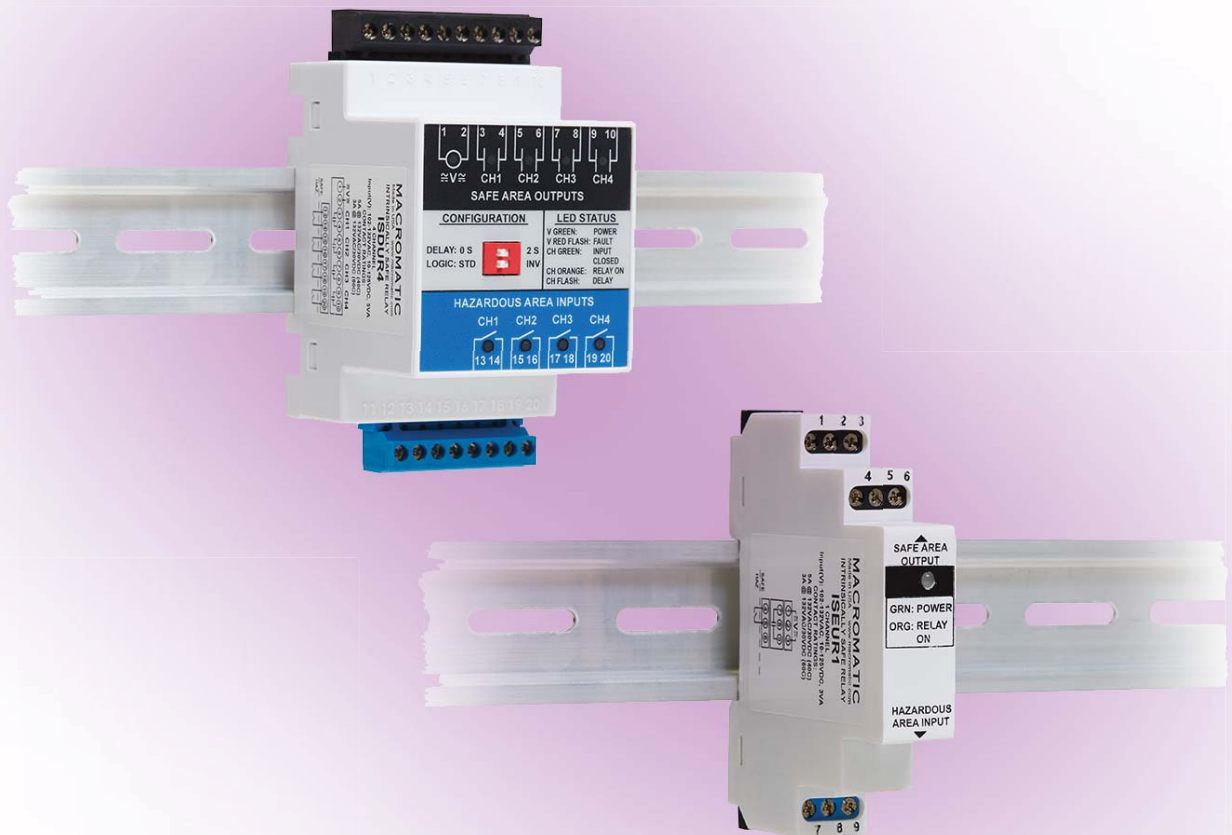

HAZARDOUS LOCATIONS OVERVIEW


When electrical equipment is used in, around, or near an atmosphere that has flammable gases or vapors, flammable liquids, combustible dusts, ignitable fibers or flyings, there is always a possibility or risk that a fire or explosion might occur. Those areas where the possibility or risk of fire or explosion might occur, due to an explosive atmosphere and/or mixture, are often called hazardous (or classified) locations. Currently, there are two systems used to classify these hazardous locations: the Class/Division system, used predominately in the United States, and the Zone system, generally used in the rest of the world.

What's Needed for An Explosion?

The most common types of reaction are between flammable gases, vapors or dust with oxygen in the surrounding air. As a rule, three basic requirements must be met for an explosion to take place in atmospheric air:

1. Flammable substance
2. Oxygen
3. Source of Ignition (a spark or high heat)

Note: both the flammable substance and the oxygen must be present in the correct mixture for the explosion to happen.

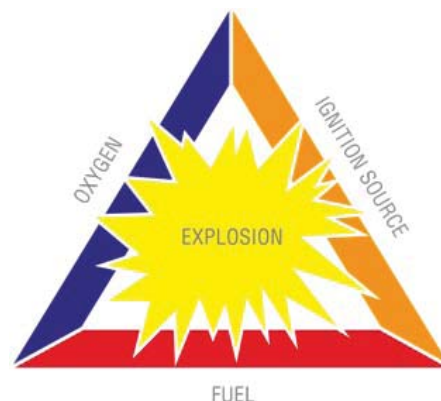

How is the Explosion Controlled?

The objective of selecting electrical equipment and the means of installation is to reduce the hazard of the electrical equipment to an acceptable level. The most certain method of preventing an explosion is to locate electrical equipment outside of hazardous (classified) areas whenever possible. In situations where this is not practical, installation techniques and enclosures are available which meet the requirements for locating electrical equipment in such areas. These methods of reducing hazards are based on the elimination of one or more of the elements of the ignition triangle discussed earlier.

Three principles ensure that electrical equipment does not become a source of ignition:

1. **Contain the explosion:** measures must be taken to ensure the explosion cannot spread to the surrounding atmosphere (explosion-proof enclosures or conduit & cable seals)
2. **Isolate the hazard:** the surrounding atmosphere is prevented from entering the enclosure by maintaining a positive pressure of inert gas or clean air within the unit (pressurization and purging, oil immersion & hermetic sealing)
3. **Limit the energy:** potentially explosive mixtures can penetrate the enclosure but must not be ignited. Sparks and raised temperatures must only occur within certain limits (intrinsic safety)

All Macromatic IS Series Intrinsically Safe Relays follow the third principal: **limit the energy utilizing an intrinsically safe circuit.**

HAZARDOUS LOCATION CLASSIFICATIONS

Standard classification systems provide a concise description of the hazardous material that may be present along with the probability of it being present so that the appropriate equipment may be used and safe installation practices followed. In North America, the classification system most widely used is defined by the NFPA Publication 70, NEC and CEC. They define the type of hazardous substances that is or may be present in the air in sufficient quantities to produce an explosion. The NFPA establishes area classifications based on Classes, Divisions and Groups which are factors combined to define the hazardous conditions of a specific area.

The table below summarizes the various hazardous (classified) locations:

Substance	Substance Class	Area Classification		Hazardous Location Characteristics
		NEC500	NEC505	
Gases/ Vapors	Class I (NEC 501)	Division 1	Zone 0	Explosion hazard present continuously or occasionally under normal operating conditions
			Zone 1	
		Division 2	Zone 2	Ignitable concentrations of flammable gases or vapors are not normally present, but could be present in the case of a fault
Dusts	Class II (NEC 502)	Division 1	Zone 20	Combustible dusts are present in quantities sufficient to produce explosive and ignitable
			Zone 21	
		Division 2	Zone 22	Combustible dust due to abnormal operations may be present in quantities sufficient to produce explosive or ignitable mixtures
Fibers	Class III (NEC 503)	Division 1	Not equivalent	Easily ignitable fibers/fyings are handled or manufactured
		Division 2		Easily ignitable fibers/fyings are stored or handled

The Macromatic ISD & ISE Series of Intrinsically Safe Relays are certified Class I, Division 1 in the United States and Class I, Zones 0 and 1 in Canada.

The Macromatic ISD & ISE Series of Intrinsically Safe Relays have been tested and approved for listing under Underwriters Laboratory (UL) 913 Intrinsically Safe Apparatus and Associated Apparatus 8th Edition. The Macromatic ISP Series of Intrinsically Safe Relays have been tested and approved for listing under Underwriters Laboratory (UL) 913 Intrinsically Safe Apparatus and Associated Apparatus 6th Edition. The input or inputs to these devices have been approved for use in all Classes, Groups and Divisions.

4-CHANNEL INTRINSICALLY SAFE RELAYS

ISD SERIES



- ◆ Approved for use in Class I, Class II, and Class III Hazardous Locations (Zones 0 & 1 in Canada)
- ◆ 4-Channel
- ◆ Isolated input terminals
- ◆ Isolated 5A relay outputs
- ◆ Pluggable terminals offer easy installation & replacement
- ◆ Universal input voltage of 102-132V AC & 10-125V DC
- ◆ Compact 60mm wide enclosure for both DIN-rail or panel-mount
- ◆ Standard & inverse logic
- ◆ Instantaneous & delayed response times
- ◆ LED status indicator



Better. By Design.

800.238.7474

WWW.MACROMATIC.COM

SALES@MACROMATIC.COM

The ISD Series of Intrinsically Safe Relays provide a safe and reliable method to control up to four loads (motor starters, relays, etc.) with up to four input devices (switches, sensors, etc.) located in a hazardous area. These products are approved for use in Class I Groups A, B, C, D, Class II Groups E, F, G, and Class III Hazardous Locations (Zones 0 & 1 in Canada). The ISD Series relay must be mounted in safe area, following Macromatic Control Drawing Number ISD1A04.

The ISD Series relays utilize a compact 60mm wide enclosure that can be both mounted on 35mm DIN rail or panel-mounted with two screws. Terminals for the input devices from the hazardous area are on the bottom of the unit for easy access in the enclosure to incoming wiring from the hazardous area. Pluggable terminal blocks on both the input and output sides allow for easy initial wiring of the unit as well as replacement without having to remove any wires. Each input has two terminals, which eliminates the need to mount a separate terminal block to connect multiple incoming COM wires. Each output relay has two terminals for isolation from the others, allowing outputs to be at different voltages, i.e., contactor coils at 120V AC and an alarm circuit at 24V DC. A universal input voltage of 102-132V AC & 10-125V DC covers a variety of applications with one device.

Operation

Each ISD Series product consists of 4 intrinsically safe inputs and 4 corresponding electromechanical relay outputs. With input voltage applied, the V LED will be ON (GREEN) to indicate power is applied. When the input device is closed, the input LED is ON (GREEN). When the output relay is energized, the output LED is ON (ORANGE).

These products offer four operating configurations to meet a wide variety of applications. Each configuration is user-selectable using two DIP-switches easily accessible and clearly marked on the top of the product. Each setting will apply to all channels:

DELAY: 0 S LOGIC: STD 2 S INV



Standard Logic (DIP Switch set to "STD"):

When the input device in the hazardous area is closed, the corresponding output relay is energized. When the input device opens, the corresponding output relay will de-energize.

Inverse Logic (DIP Switch set to "INV"):

When the input device in the hazardous area is open, the corresponding output relay is energized. When the input device closes, the corresponding output relay will de-energize.

No Time Delay (DIP Switch set to "0 S"):

The output relay will have an immediate change in status in response to the input device closing or opening.

Fixed 2 Second Delay (DIP Switch set to "2 S"):

The output relay will delay 2 seconds before a change of status in response to the input device closing or opening.

INPUT VOLTAGE	NUMBER OF CHANNELS	CATALOG NUMBER	WIRING
102-132V AC (50/60Hz) & 10-125V DC	4	ISDUR4	DIAGRAM 814

4-CHANNEL INTRINSICALLY SAFE RELAYS

ISD SERIES

APPLICATION DATA

Input Voltage: 102-132V AC (50/60Hz.) & 10-125V DC

Load (Burden): 5VA Maximum

Input Switch Open Circuit Voltage: 10V DC

Output Contacts:

SPST-NO (Form A) 3A Resistive @ 125V AC @60°C & 30V DC Resistive, Pilot Duty Rating D300

SPST-NO (Form A) 5A Resistive @ 125V AC @40°C & 30V DC Resistive, Pilot Duty Rating D300

Life: Electrical: 50,000 Closures @ Full Load AC
Mechanical: 5 Million Closures @ No Load

Response Times:

Standard (DIP Switch set to "0S"): < 50ms

Delay (DIP Switch set to "2S"): Fixed 2 Seconds

Temperature:

Operating: -28° to +60° C (-18° F to +140° F)

Storage: -55° to +85° C (-67° to 185° F)

LED Indication:

V: ON (Green); Inputs: ON (Green); Outputs: ON (Orange)

Insulation Voltage:

1500 V AC between coil & contacts

750 V AC between open contacts

1500 V AC between contacts of different output channels

1500 V AC between hazardous and safe circuits

Wire Sizes:

One #14-24 AWG Conductor or

Two #16 or 18 AWG Conductors

Mounting: Mounts on 35mm DIN-rail or panel-mounted with two #8 screws when DIN-rail clips are fully extended from under the enclosure.

Control Drawing: Visit www.macromatic.com/isd1a04 to view Macromatic Control Drawing ISD1A04.


Approvals:



UL913 8th Edition
E318075



DIMENSIONS

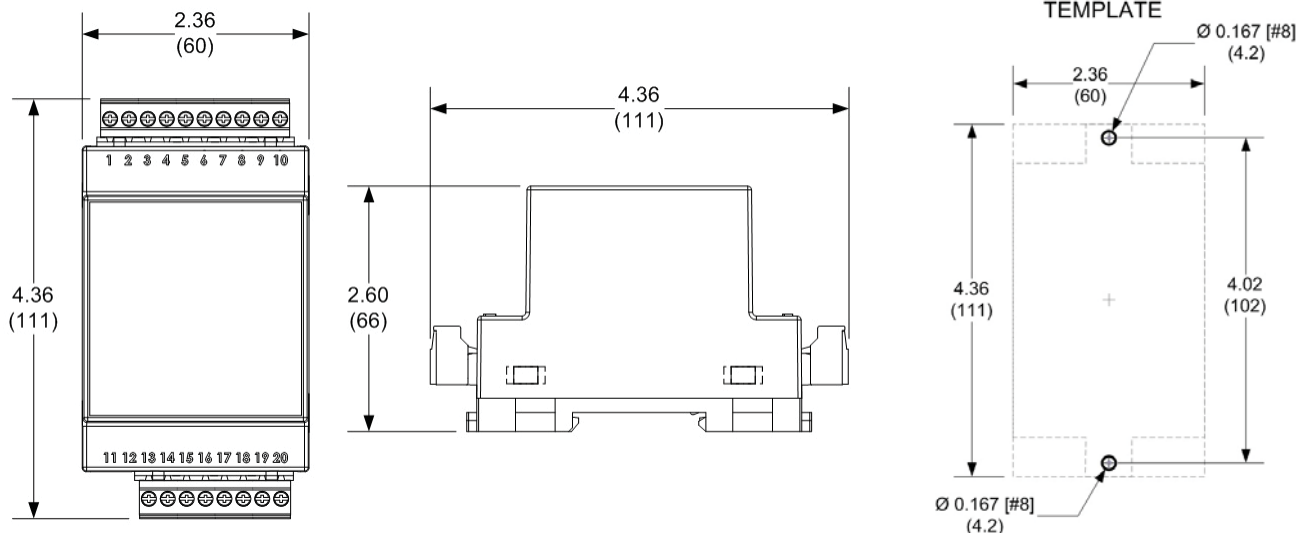

All Dimensions in
Inches (Millimeters)

1-CHANNEL INTRINSICALLY SAFE RELAYS

ISE SERIES



- ◆ Approved for use in Class I, Class II, and Class III Hazardous Locations (Zones 0 & 1 in Canada)
- ◆ 1-Channel
- ◆ 5A relay output
- ◆ Universal input voltage of 102-132V AC & 10-125V DC
- ◆ Compact 17.5mm wide enclosure for both DIN-rail or panel-mount
- ◆ LED status indicator


UL913 8th Edition




The ISE Series of Intrinsically Safe Relays provide a safe and reliable method to control a single load (motor starters, relays, etc.) with a single input device (switches, sensors, etc.) located in a hazardous area. These products are approved for use in Class I Groups A, B, C, D, Class II Groups E, F, G, and Class III Hazardous Locations (Zones 0 & 1 in Canada). The ISE Series relay must be mounted in a safe area, following Macromatic Control Drawing Number ISD2A01.

The ISE Series relays utilize a compact 17.5mm wide enclosure that can be both mounted on 35mm DIN rail or panel-mounted with two screws. Hazardous terminals are on the bottom of the unit for easy access in the enclosure to incoming wiring from the hazardous area and are clearly marked.

Operation

Each ISE Series relay consists of an intrinsically safe input and a corresponding electromechanical relay output. There is one bi-color LED for status indication. With input voltage applied, the LED will be ON (Green) to indicate power is applied. When the input device from the hazardous area is closed, the output relay is energized and the LED is ON (Orange). When the input device opens, the output relay will de-energize and the LED will be ON (Green).

INPUT VOLTAGE	NUMBER OF CHANNELS	CATALOG NUMBER	WIRING
102-132V AC (50/60Hz) & 10-125V DC	1	ISEUR1	 DIAGRAM 811



Better. By Design.

800.238.7474

WWW.MACROMATIC.COM

SALES@MACROMATIC.COM

1-CHANNEL INTRINSICALLY SAFE RELAYS

ISE SERIES

APPLICATION DATA

Input Voltage: 102-132V AC (50/60Hz.) & 10-125V DC

Load (Burden): 5VA Maximum

Input Switch Open Circuit Voltage: 10V DC

Output Contacts:

SPST-NO (Form A) 3A Resistive @ 125V AC @ 60°C & 30V DC Resistive, Pilot Duty Rating D300

SPST-NO (Form A) 5A Resistive @ 125V AC @ 40°C & 30V DC Resistive, Pilot Duty Rating D300

Life: Electrical: 50,000 Closures @ Full Load AC
Mechanical: 5 Million Closures @ No Load

Response Times: < 50ms

Temperature:

Operating: -28° to + 60° C (-18° F to +140° F)

Storage: -55° to +85° C (-67° to 185° F)

LED Indication:

ON (Green) - Input voltage; ON (Orange) - Input closed and relay energized

Insulation Voltage:

1500 V AC between coil & contacts

750 V AC between open contacts

1500 V AC between hazardous and safe circuits

Wire Sizes:

One #14-24 AWG Conductor or

Two #16 or 18 AWG Conductors

Mounting: Mounts on 35mm DIN-rail or panel-mounted with two #8 screws when DIN-rail clips are fully extended from under the enclosure.

Control Drawing: Visit www.macromatic.com/isd2a01 to view Macromatic Control Drawing ISD2A01.


Approvals:



UL913 8th Edition
E318075



DIMENSIONS

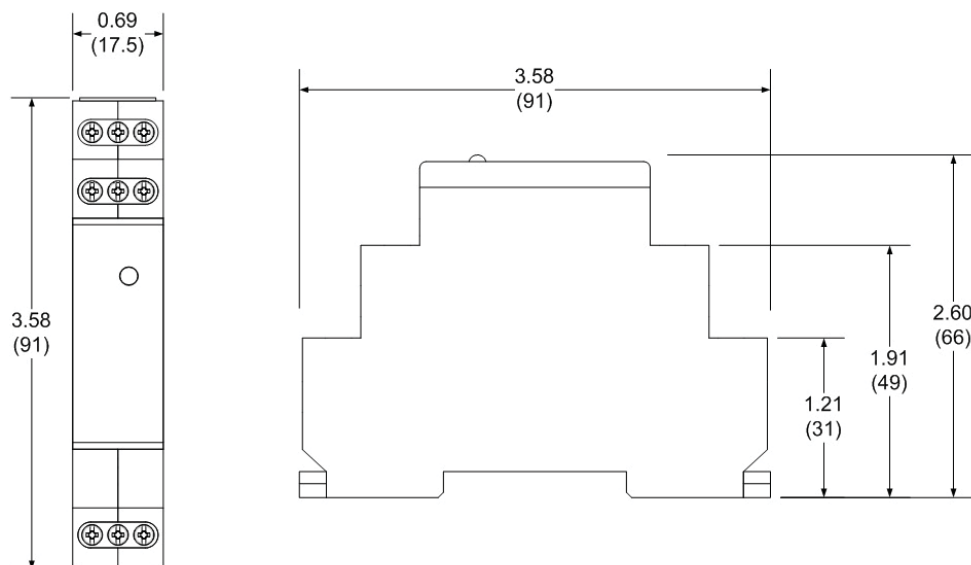

All Dimensions in
Inches (Millimeters)

1-CHANNEL INTRINSICALLY SAFE RELAYS

ISP SERIES



- ◆ Approved for use in Class I, Class II, and Class III Hazardous Locations
- ◆ 1-Channel
- ◆ Input voltage of 120V AC
- ◆ 10A relay output
- ◆ Plug-in enclosure
- ◆ LED status indicator



The ISP Series of Intrinsic Safe Relays provide a safe and reliable method to control a single load (motor starters, relays, etc.) with a single input device (switches, sensors, etc.) located in a hazardous area. These products are approved for use in Class I Groups A, B, C, D, Class II Groups E, F, G, and Class III Hazardous Locations. The ISP Series relay must be mounted in a non-hazardous area, following Macromatic Control Drawing Number ISR2A01D.

The ISP Series relays utilize an 8 pin plug-in enclosure (included) that can be both mounted on 35mm DIN rail or panel-mounted with two screws.

Operation

Each ISP Series relay consists of an intrinsically safe input and a corresponding electromechanical relay output. There is one LED for status indication. With input voltage applied, the LED will be OFF. When the input device from the hazardous area is closed, the output relay is energized and the LED is ON (Green). When the input device opens, the output relay will de-energize and the LED will be OFF.

INPUT VOL TAGE 50/60Hz	NUMBER OF CHANNELS	CATALOG NUMBER	WIRING/ SOCKETS ■
120V AC	Single	ISP120A	DIAGRAM 160

- Both an integral spring mating clip and the appropriate 8 pin socket are included with the plug-in relay.



Better. By Design.

800.238.7474

WWW.MACROMATIC.COM

SALES@MACROMATIC.COM

Sockets & Accessories available

SINGLE CHANNEL INTRINSICALLY SAFE RELAYS

ISP SERIES

APPLICATION DATA

Input Voltage:

120V AC, $\pm 10\%$, 50/60Hz

Load (Burden):

1.25 VA

Output Contacts:

SPST-NO 10A @ 120V AC Resistive

Life:

Mechanical: 10,000,000 operations

Full Load: 100,000 operations

Response Times:

Operate: 1 1 ms

Release: 4 ms

Temperature:

Operate: -20° to 60°C (-4° to 140°F)

Storage: -45° to 85°C (-49° to 185°F)

Insulation Voltage:

2,000 volts

LED Indicator:

Green ON when relay is energized & OFF when relay is de-energized.

Mounting:


Both an integral spring mating clip and the appropriate 8 pin socket are included with the plug-in relay. The socket can be both mounted on 35mm DIN rail or panel-mounted with two screws.

Control Drawing: Visit www.macromatic.com/isr2a01D to view Macromatic Control Drawing ISR2A01D.

Approvals:

File #E318075

DIMENSIONS

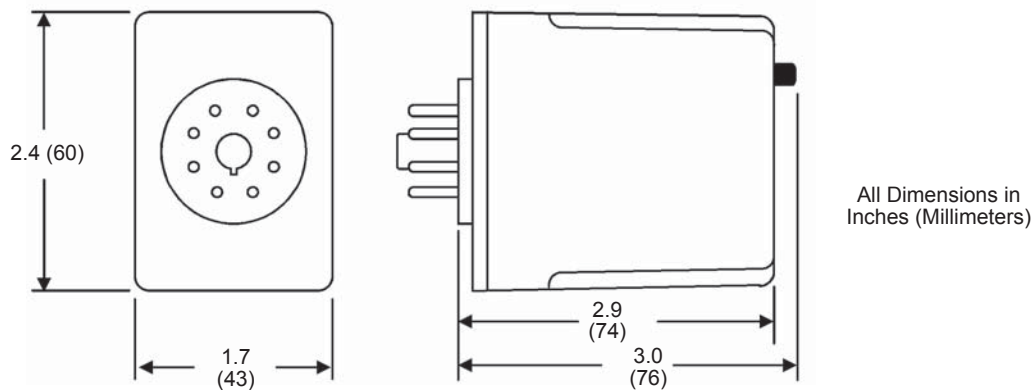

MACROMATIC INDUSTRIAL CONTROLS

Located in Menomonee Falls, Wisconsin, Macromatic Industrial Controls engineers and manufactures industrial relays that control electrical processes and monitor power for damaging fault conditions.

Macromatic provides solutions for almost any application in any industry. Macromatic's products are used in the HVACR, pump control, material handling, motor control, generator, and lift and elevator industries, plus more.

As an independently-owned manufacturer of state-of-the-art control and monitoring products for over 40 years, Macromatic takes pride in its short lead-time, flexible product design, and exceptional technical support.

Visit www.macromatic.com today.





Better. By Design.

MACROMATIC INDUSTRIAL CONTROLS

FAMILY OF PRODUCTS

MACROMATIC INDUSTRIAL CONTROLS

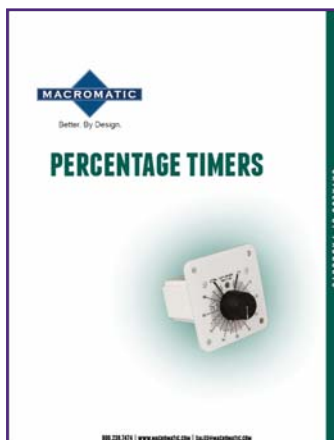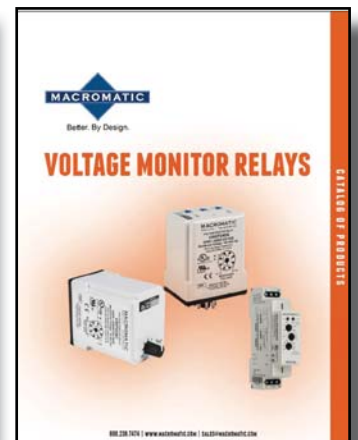

Better. By Design.